

# DESKTOP BASE MICROPHONE BM-3014

## MICRÓFONO DE MESA BM-3014

### REF. 91202

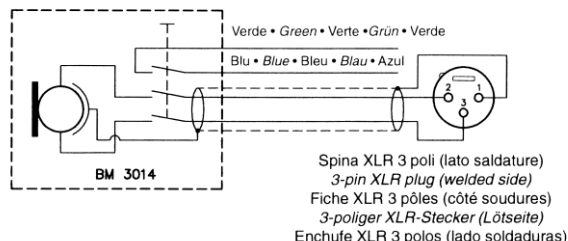


Fig./Abb. 3 - BM 3014 Schema elettrico • Wiring diagram • Schéma électrique  
Elektrischer Schaltplan • Esquema eléctrico

### USING THE STAND

The "PUSH TO TALK " button on the stand controls unstable microphone activation: the microphone stays on only as long as this button is pressed.

### TECHNICAL DATA

|                      |                                         |
|----------------------|-----------------------------------------|
| Microphone type      | Dynamic                                 |
| Directivity          | Mono-directional - cardioid             |
| Sensitivity          | 1.4 mV/Pa                               |
| Frequency response   | 100 ÷ 12,000 Hz                         |
| S/N ratio            | > 40 dB / 1 µbar                        |
| Dimensions           | 132 x 200 x 70 mm (excluding gooseneck) |
| Weight               | 1.6 kg                                  |
| Accessories included | Connecting cable 5 m long.              |

### USO DE LA BASE

La tecla "PUSH TO TALK" de la base controla la conexión estable del micrófono: el micrófono está inserto sólo mientras la tecla está apretada.

### DATOS TÉCNICOS

|                         |                                         |
|-------------------------|-----------------------------------------|
| Tipo micrófono          | Dinámico                                |
| Dirección               | Unidireccional - cardiode               |
| Sensibilidad            | 1,4 mV/Pa                               |
| Respuesta de frecuencia | 100 - 12.000 Hz                         |
| Relación S/N            | > 40dB / mbar                           |
| Dimensiones             | 132 x 200 x 70 mm. (sin brazo flexible) |
| Peso                    | 1,6 Kg                                  |
| Accesorios de serie     | cable de conexión de 5 m de longitud.   |